


Testing Kit-Type TK1

- Comprising of: 2 Pressure gauges 1.6% accuracy to BS EN 837-1 (1998) formally BS1780.
2 Pressure gauge adaptor probes, 2 Bimetal pocket thermometers -10 to + 110°C or -40 to + 70°C.
1 Bottle (liquid soap), 1 Case with foam inserts.
- Pressure gauges standard calibrations up to 40 BAR & PSI state required pressure.
If not stated 7 BAR & PSI will be supplied.
- Bimetal pocket thermometers. State required temperature, If not stated -10 to + 110°C will be supplied.

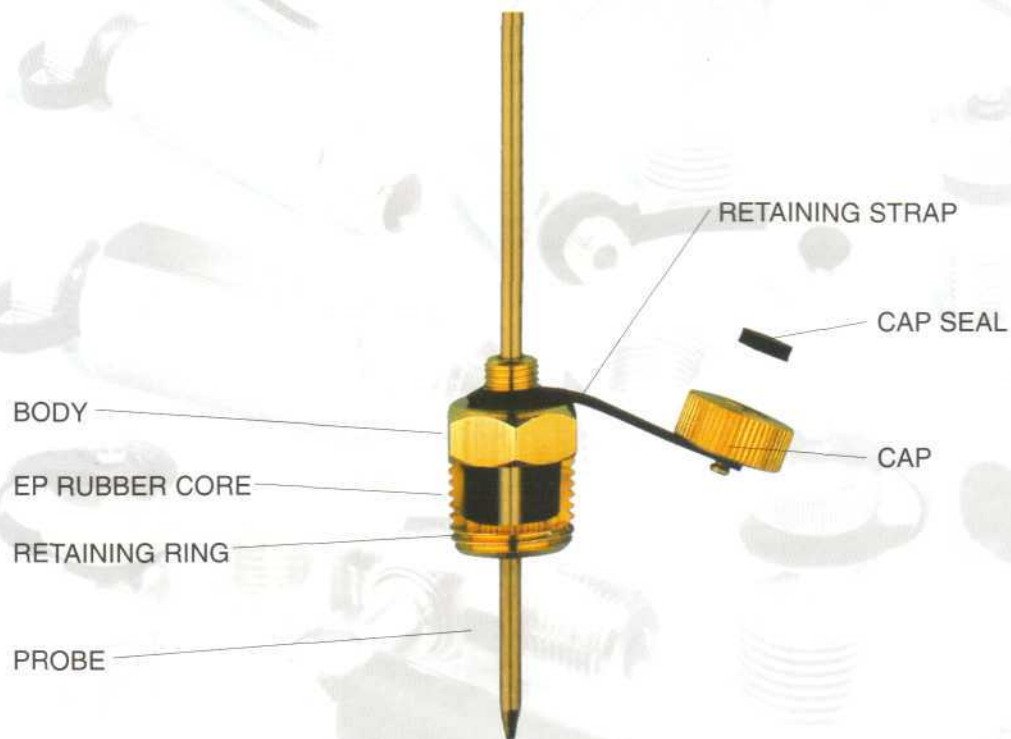

Data sheets available for:-

- Installing "Binder" test plugs.
- Operating procedures for obtaining pressure and temperature readings.
- Pipework schematic.